


Triplex Plunger Pump

EHP-3K 75S

Hauhinco

AN HBT GROUP COMPANY

Stainless Steel Pumphead, cylinder valve design (SZ)

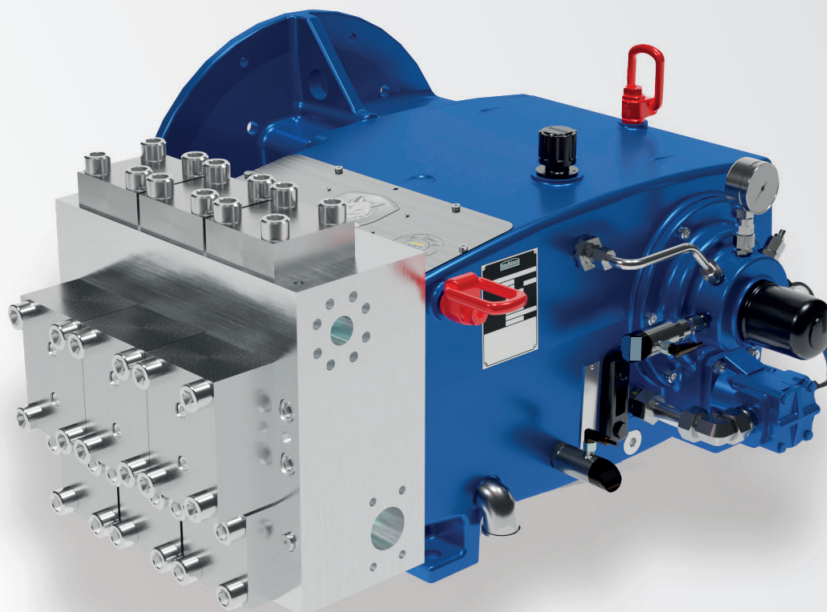

Technical data

Type	Plunger-diameter mm	Input speed 1.500 1/min				Input speed 1.800 1/min	
		Gearbox ratio 3,167		Gearbox ratio 2,524		Gearbox ratio 3,167	
		max. Operating pressure ^[1] bar	Flow rate dm ³ /min	max. Operating pressure ^[1] bar	Flow rate dm ³ /min	max. Operating pressure ^[1] bar	Flow rate dm ³ /min
HD	25	500	42	500	53	500	50
	32	500	69	460	86	500	82
	36	460	87	360	109	380	104
	40	380	107	300	134	320	129
	45 ^[2]	300	136	240	170	250	163
ND	50	240	167	190	210	200	201
	57,5	180	221	140	278	150	266

■ **max. input speed:**
1,500 / 1,800 1/min

■ **max. input power:**
75 kW

■ **available variations:**
Stainless steel pumphead cylinder valve design (SZ)

1 kW = 1.3410 HP 1 bar = 14.5038 psi
1 kg = 2.205 lbs 1 l = 0.26417 Gal.

^[1] Max. approved operating pressure at the pressure connection pump head.

^[2] On request.

^[3] The weight specifications apply for pumps without any attachment parts.

Triplex Plunger Pump



EHP-3K 75S



Hauhinco

AN HBT GROUP COMPANY



Flange-type

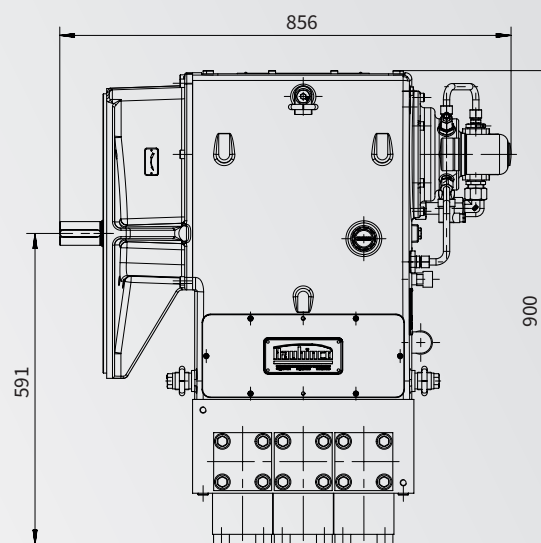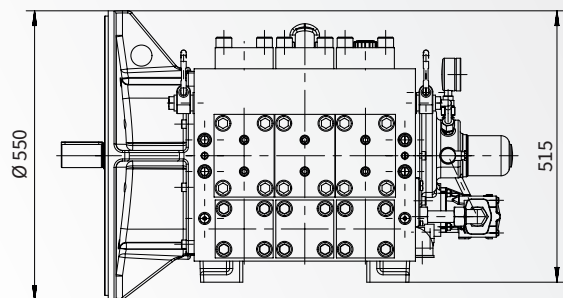

■ Weight ^[3]

650 kg

Foot-type

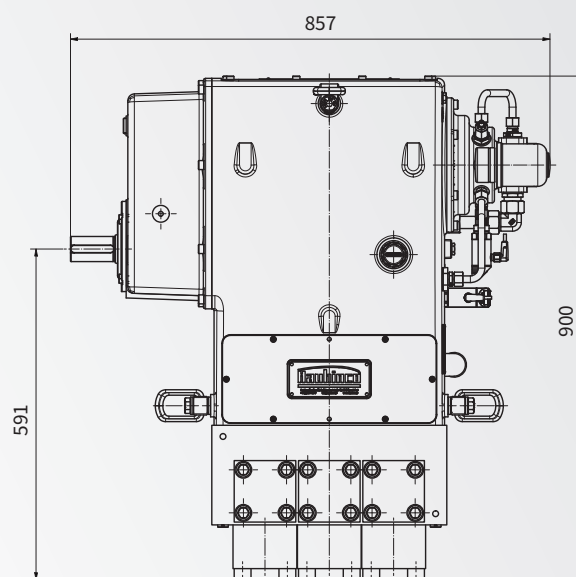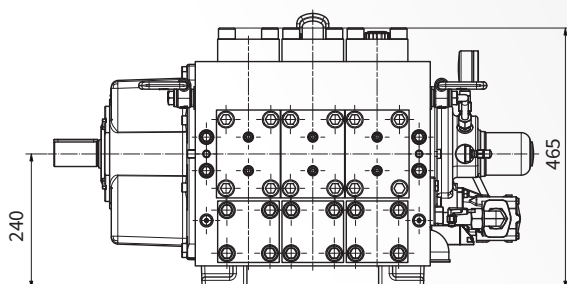

■ Weight ^[3]

620 kg

Technical specifications are subject to change. All information and illustrations are non-binding.

Hauhinco Maschinenfabrik GmbH

Hölterstraße 51
45549 Sprockhövel
Germany

Phone: +49 2324 705-0
Fax: +49 2324 705-222
E-mail: sales@hauhinco.de
Web: www.hauhinco.de

HBT Americas LLC

1325 Evans City Road
Evans City
Pennsylvania
16033 USA

Phone: +1 724 789-7050
Fax: +1 724 789-7056
E-mail: info@hauhinco.com
Web: www.hauhinco.com