


Triplex Plunger Pump

EHP-3K 300S

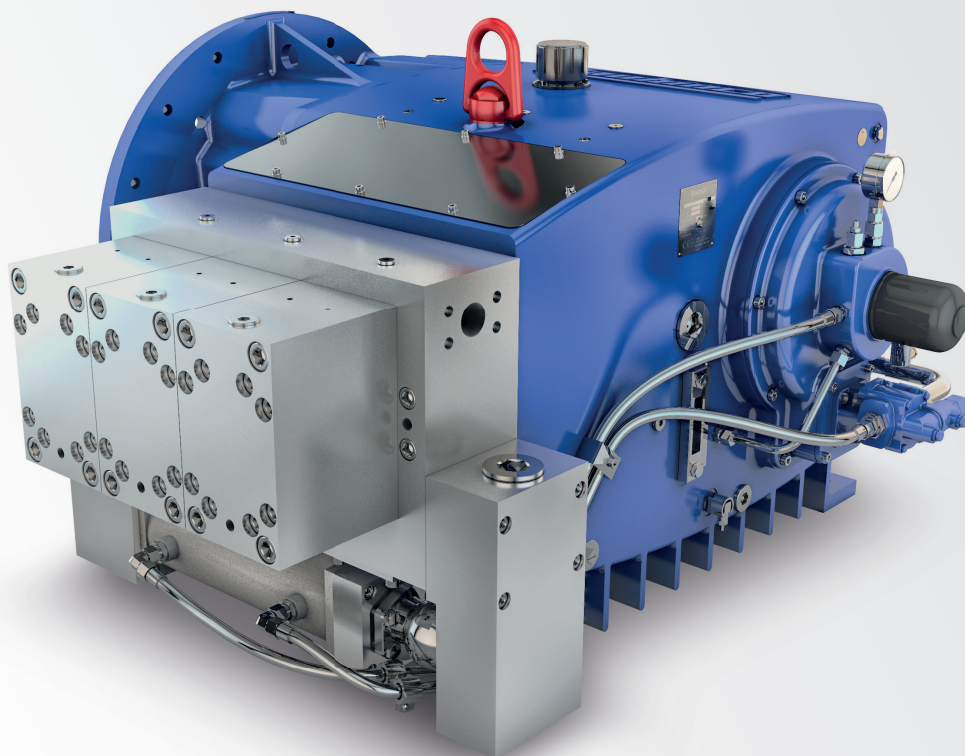

Technical data

Plunger diameter	Flow rate Q_{th} dm ³ /min		max. Operating pressure ^[2]
	Input speed 1,500 1/min	Input speed ^[1] 1,800 1/min	
mm			bar
53	324	326	500
57.5	381	383	420
62	443	445	380
70	564	568	290

■ **max. Input speed:**
1,500 / 1,800 1/min

■ **max. Input power:**
300 kW

1 kW = 1.3410 HP 1 bar = 14.5038 psi
1 kg = 2.205 lbs 1 l = 0.26417 Gal.

^[1] Reduction gear box for 60 Hz operation (input speed = 1,800 1/min).


^[2] Max. approved operating pressure at the pressure connection pump head.

^[3] The weight specifications apply for pumps without any attachment parts.


Triplex Plunger Pump

EHP-3K 300S


Flange-type with cylinder valve design

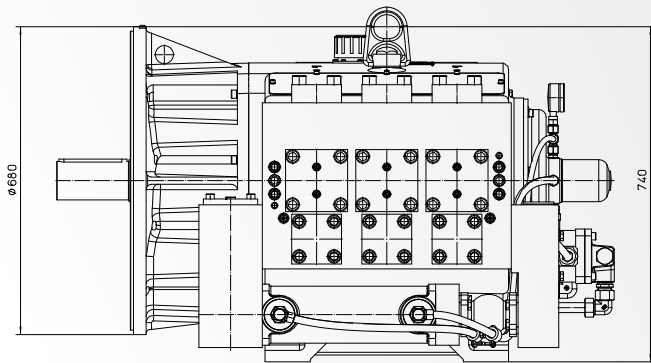


■ Weight^[3]
1,830 kg

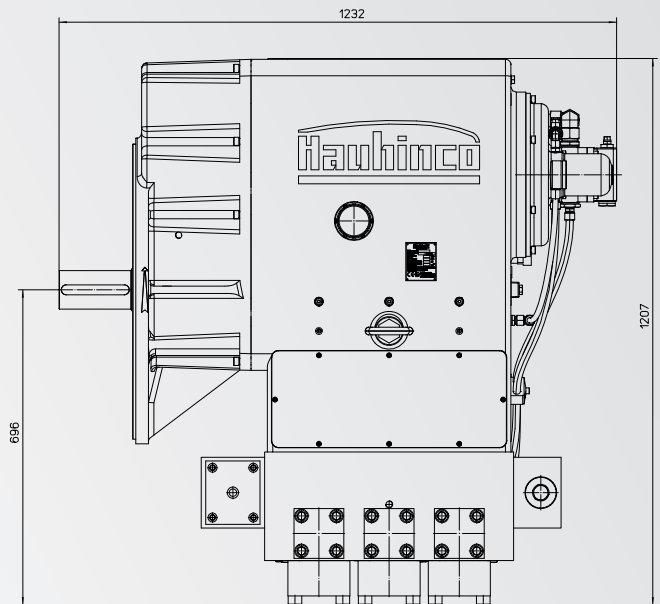

Flange-type with plate valve design

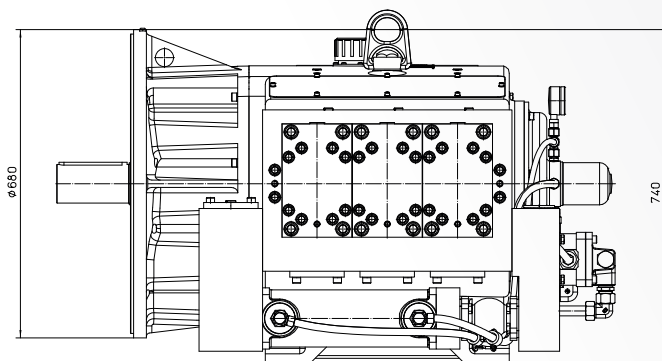

■ Weight^[3]
1,770 kg

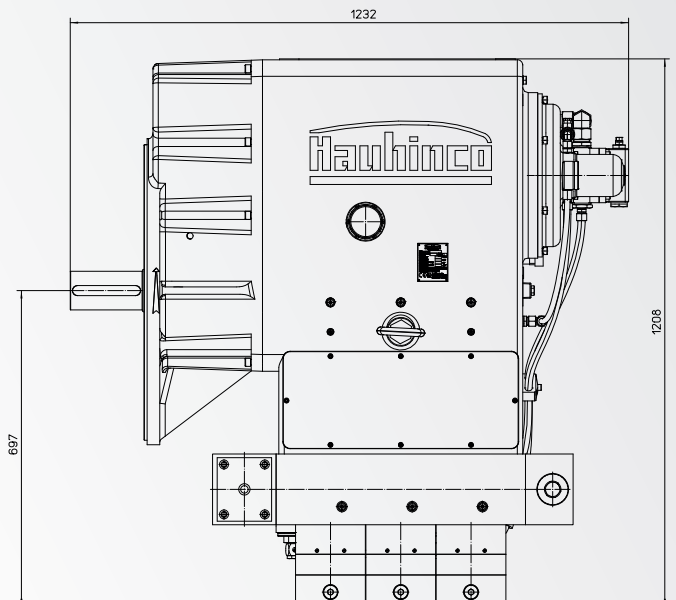

EHP-3K 300S

Hauhinco Maschinenfabrik GmbH & Co. KG

Beisenbruchstraße 10
45549 Sprockhövel
Germany

Phone: +49 2324 705-0
Fax: +49 2324 705-222
E-mail: info@hauhinco.de
Web: www.hauhinco.de

Hauhinco LP

1325 Evans City Road
Evans City
Pennsylvania
16033 USA

Phone: +1 724 789-7050
Fax: +1 724 789-7056
E-mail: info@hauhinco.com
Web: www.hauhinco.com