


Triplex Plunger Pump

EHP-3K 200

Hauhinco

AN HBT GROUP COMPANY

Cast-on Pumphead, plate valve design (GP)

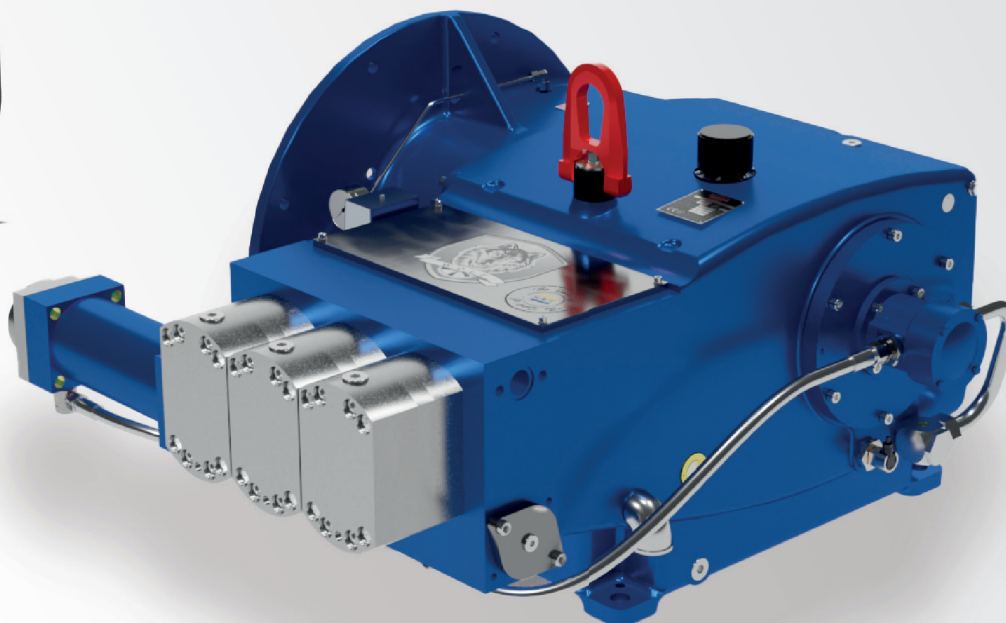

Technical data

Plunger-diameter	Input speed 1,500 1/min				Input speed 1,800 1/min	
	Gear ratio 2,25		Gear ratio 2,706		Gear ratio 2,706	
	max. Operating pressure ^[1]	Flow rate	max. Operating pressure ^[1]	Flow rate	max. Operating pressure ^[1]	Flow rate
mm	bar	dm ³ /min	bar	dm ³ /min	bar	dm ³ /min
50	400	275	400	229	400	274
53	360	309	360	257	360	308
55	330	333	330	277	330	332
57,5	300	364	300	302	300	363
62	260	423	260	351	260	422
70	200	539	200	448	200	538
80	160	704	160	585	160	702

■ **max. input speed:**
1,500 / 1,800 1/min

■ **max. input power:**
200 kW

■ **available variations:**
Cast-on pumphead plate valve design (GP)
Stainless steel pumphead cylinder valve design (SZ)

1 kW = 1.3410 HP 1 bar = 14.5038 psi
1 kg = 2.205 lbs 1 l = 0.26417 Gal.

^[1] Max. approved operating pressure at the pressure connection pump head.

^[2] The weight specifications apply for pumps without any attachment parts.

Triplex Plunger Pump


EHP-3K 200



Hauhinco

AN HBT GROUP COMPANY

Flange-type

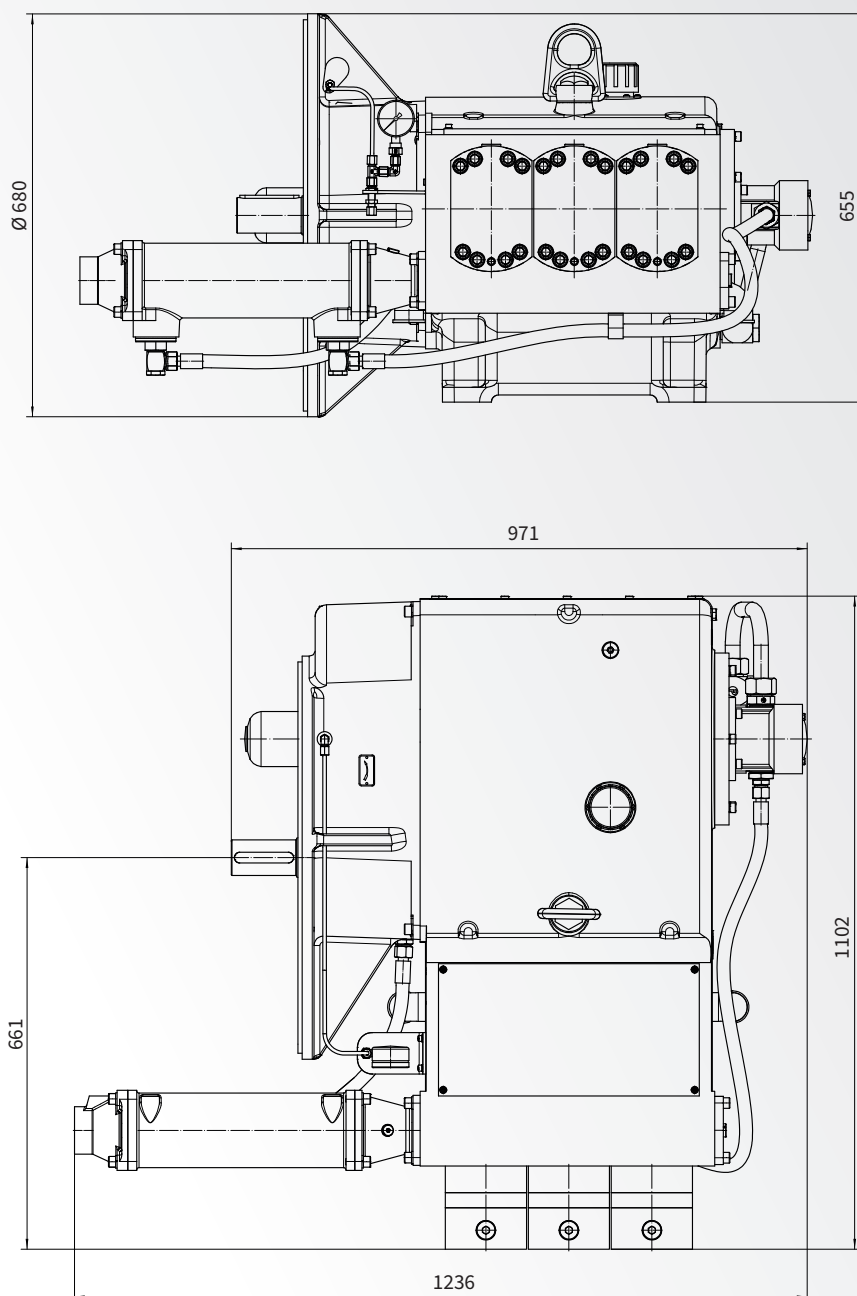

■ **Weight⁽⁴⁾**
830 kg

Technical specifications are subject to change. All information and illustrations are non-binding.

Hauhinco Maschinenfabrik GmbH

Hölterstraße 51
45549 Sprockhövel
Germany

Phone: +49 2324 705-0
Fax: +49 2324 705-222
E-mail: sales@hauhinco.de
Web: www.hauhinco.de

HBT Americas LLC

1325 Evans City Road
Evans City
Pennsylvania
16033 USA

Phone: +1 724 789-7050
Fax: +1 724 789-7056
E-mail: info@hauhinco.com
Web: www.hauhinco.com