


Triplex Plunger Pump

EHP-3K 125S, 150S

Hauhinco

AN HBT GROUP COMPANY

Stainless Steel Pumphead, cylinder valve design (SZ)

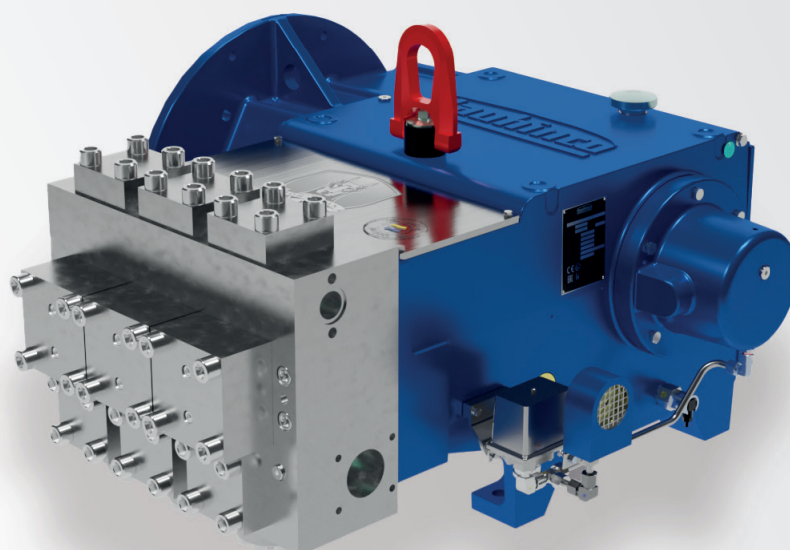

Technical data

Type	Plunger-diameter	Input speed 1.500 1/min				Input speed 1.800 1/min	
		Gear ratio 2,19		Gear ratio 2,667		Gear ratio 2,667	
		max. Operating pressure ^[1]	Flow rate	max. Operating pressure ^[1]	Flow rate	max. Operating pressure ^[1]	Flow rate
	mm	bar	dm ³ /min	bar	dm ³ /min	bar	dm ³ /min
EHP-3K 125	50	340	202	340	166	340	199
	55	280	244	280	200	280	241
	62	220	310	220	255	220	306
	70 ^[2]	170	395	170	325	170	390
EHP-3K 150	50	340	242	340	199	340	239
	55	280	293	280	241	280	289
	62	220	372	220	306	220	367
	70 ^[2]	170	474	170	390	170	468

■ **max. input speed:**
1,500 / 1,800 1/min

■ **max. input power:**
125 resp. 150 kW

■ **available variations:**
Cast-on pumphead plate valve design (GP)
Stainless steel pumphead cylinder valve design (SZ)

1 kW = 1.3410 HP 1 bar = 14.5038 psi
1 kg = 2.205 lbs 1 l = 0.26417 Gal.

^[1] Max. approved operating pressure at the pressure connection pump head.

^[2] On request.

^[3] The weight specifications apply for pumps without any attachment parts.

Triplex Plunger Pump



EHP-3K 125S, 150S



Hauhinco

AN HBT GROUP COMPANY

Flange-type

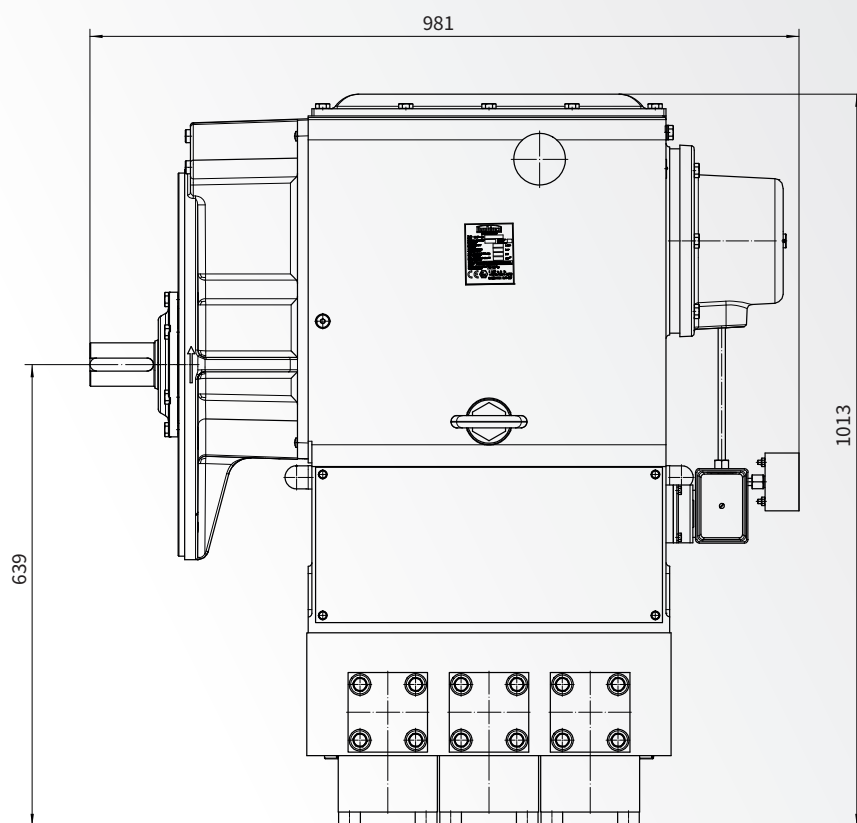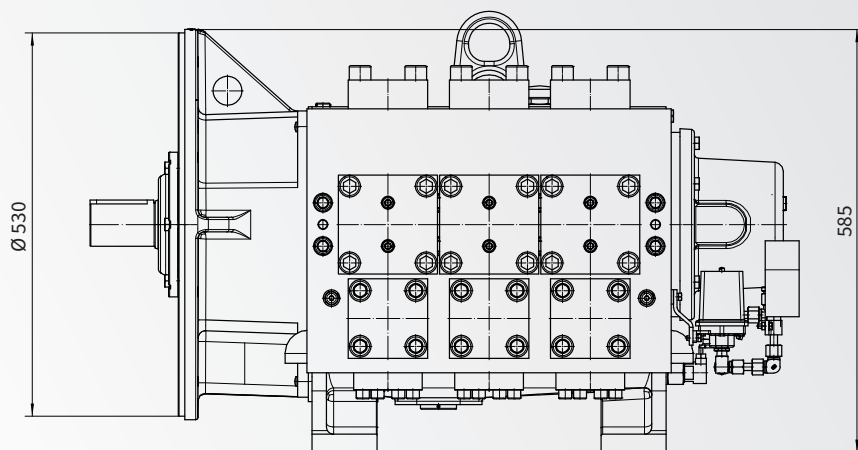

■ **Weight^[3]**
782 kg

Technical specifications are subject to change. All information and illustrations are non-binding.

Hauhinco Maschinenfabrik GmbH

Hölterstraße 51
45549 Sprockhövel
Germany

Phone: +49 2324 705-0
Fax: +49 2324 705-222
E-mail: sales@hauhinco.de
Web: www.hauhinco.de

HBT Americas LLC

1325 Evans City Road
Evans City
Pennsylvania
16033 USA

Phone: +1 724 789-7050
Fax: +1 724 789-7056
E-mail: info@hauhinco.com
Web: www.hauhinco.com