


Triplex Plunger Pump

EHP-3K 110

Cast-on Pumphead, flange valve design (GF)

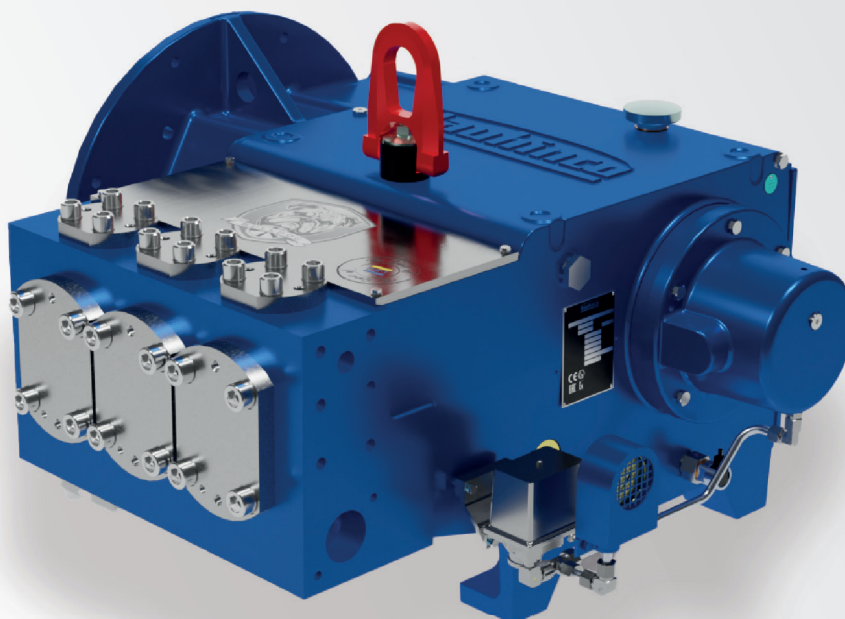

Technical data

Plunger-diameter	Input speed 1.500 1/min				Input speed 1.800 1/min	
	Gear ratio 2,19		Gear ratio 2,667		Gear ratio 2,667	
	max. Operating pressure ^[1]	Flow rate	max. Operating pressure ^[1]	Flow rate	max. Operating pressure ^[1]	Flow rate
mm	bar	dm ³ /min	bar	dm ³ /min	bar	dm ³ /min
36	575	105	575	86	575	103
40	465	129	465	106	465	127
45	365	163	365	134	365	161

■ **max. input speed:**
1,500 / 1,800 1/min

■ **max. input power:**
110 kW

■ **available variations:**
Cast-on pumphead flange type (GF)

1 kW = 1.3410 HP 1 bar = 14.5038 psi
1 kg = 2.205 lbs 1 l = 0.26417 Gal.

^[1] Max. approved operating pressure at the pressure connection pump head.

^[2] The weight specifications apply for pumps without any attachment parts.

Triplex Plunger Pump


EHP-3K 110



Hauhinco

AN HBT GROUP COMPANY

Flange-type

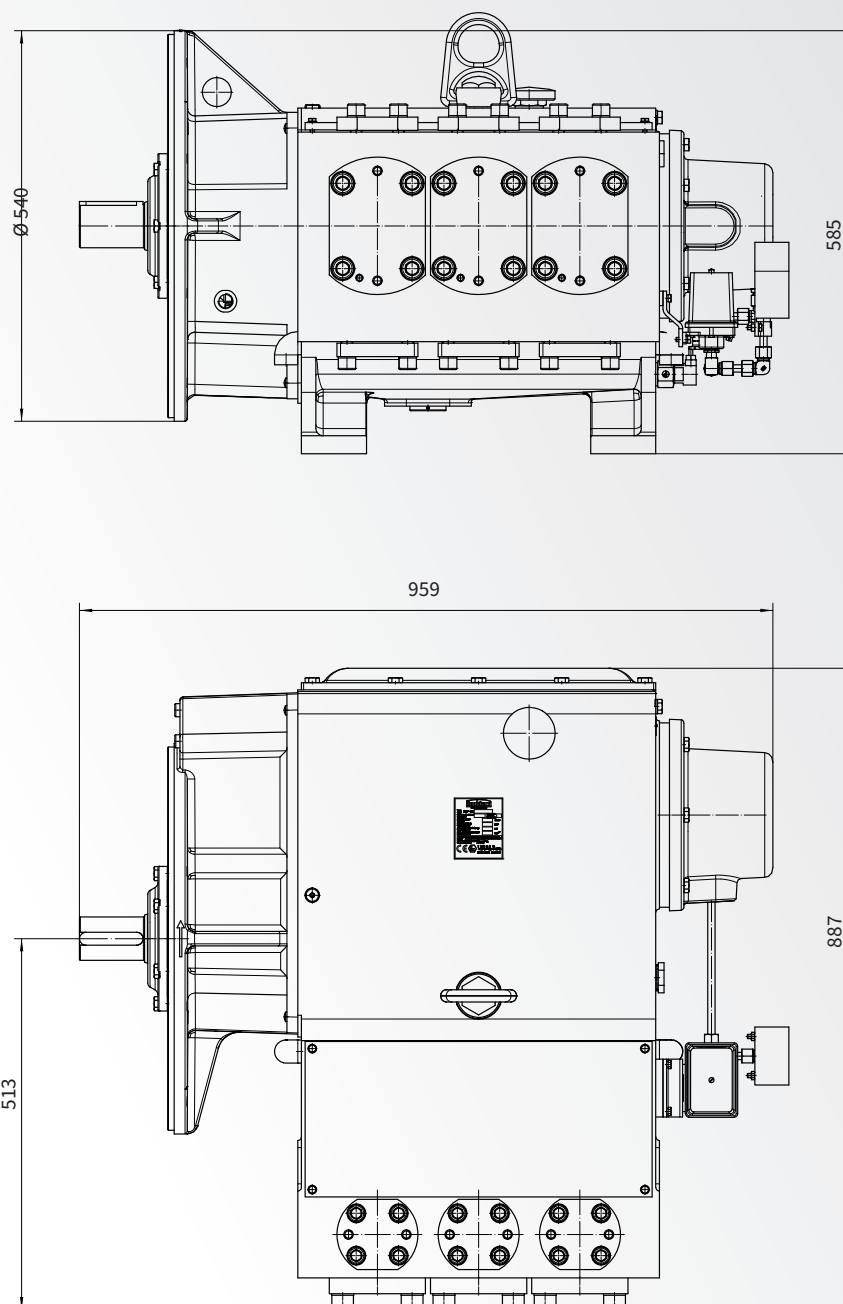

■ **Weight^[2]**
620 kg

Technical specifications are subject to change. All information and illustrations are non-binding.

Hauhinco Maschinenfabrik GmbH

Hölterstraße 51
45549 Sprockhövel
Germany

Phone: +49 2324 705-0
Fax: +49 2324 705-222
E-mail: sales@hauhinco.de
Web: www.hauhinco.de

HBT Americas LLC

1325 Evans City Road
Evans City
Pennsylvania
16033 USA

Phone: +1 724 789-7050
Fax: +1 724 789-7056
E-mail: info@hauhinco.com
Web: www.hauhinco.com